

**THORNTON**


Thornton  
Eletrônica Ltda

**NEE-30/15/11**

**Effective Core Parameters:**

|              |        |                  |
|--------------|--------|------------------|
| <b>S I/A</b> | 0,7    | mm <sup>-1</sup> |
| <b>Le</b>    | 85,5   | mm               |
| <b>Ae</b>    | 93,52  | mm <sup>2</sup>  |
| <b>Amin</b>  | - - -  | mm <sup>2</sup>  |
| <b>Ve</b>    | 8125,0 | mm <sup>3</sup>  |

Weight Approx. (piece) 15,3 g

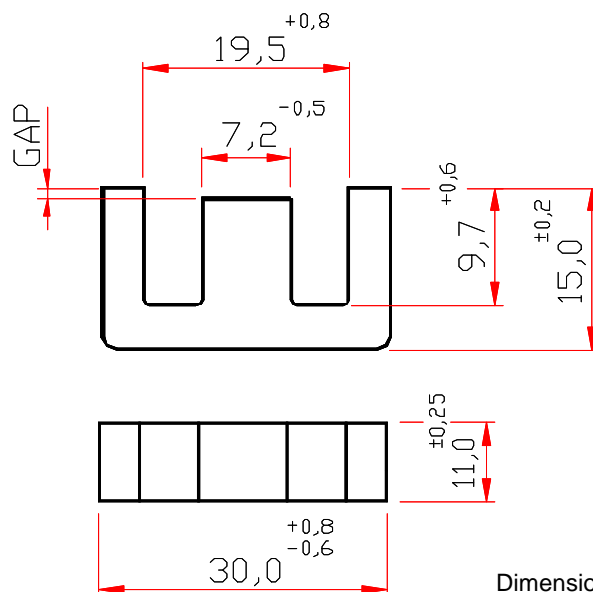

Dimensions in mm

**WITH GAP**

| DESCRIPTION ORDER      | MATERIAL | Al [nH] | Tol.% | ~g [mm] | ~ µe |
|------------------------|----------|---------|-------|---------|------|
| NEE-30/15/11-450-IP12R | IP12R    | 450     | ±10   | 0,25    | 250  |

**WITHOUT GAP**

| DESCRIPTION ORDER       | MATERIAL | Al [nH] | Tol.% | ~g [mm] | ~ µe |
|-------------------------|----------|---------|-------|---------|------|
| NEE-30/15/11-2600-IP12R | IP12R    | 2600    | 10    | - - -   | 1448 |

Others AL's by consulting