

THORNTON


Thornton
Eletrônica Ltda

NEE-40/17/12

Effective Core Parameters:

S I/A	0,52	mm ⁻¹
Le	77,0	mm
Ae	148,0	mm ²
Amin	---	mm ²
Ve	11300,0	mm ³

Weight Approx. (piece) 29,0 g

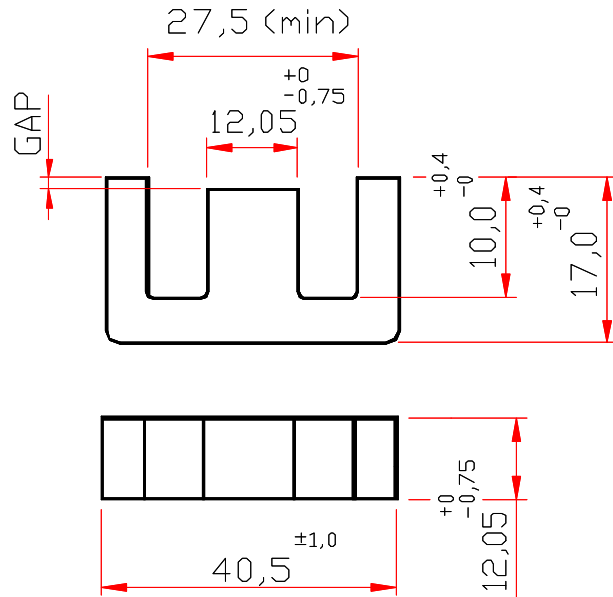

Dimensions in mm

WITH GAP

DESCRIPTION ORDER	MATERIAL	Al [nH]	Tol.%	~g [mm]	~ µe
NEE-40/17/12-60-IP12R	IP12R	60	±8	2,50	24,7
NEE-40/17/12-100-IP12R	IP12R	100	±10	2,60	41,3
NEE-40/17/12-130-IP12R	IP12R	130	±10	0,20	53,7
NEE-40/17/12-150-IP6	IP6	150	±10	1,56	62
NEE-40/17/12-150-IP12R	IP12R	150	±10	1,56	62
NEE-40/17/12-150-IP12E	IP12E	150	±10	1,56	62
NEE-40/17/12-156-IP12R	IP12R	156	±10	1,53	64
NEE-40/17/12-200-IP12R	IP12R	200	±10	1,50	83
NEE-40/17/12-200-IP12E	IP12E	200	±10	1,50	83
NEE-40/17/12-210-IP12R	IP12R	210	±10	1,40	86,8
NEE-40/17/12-220-IP12R	IP12R	220	±10	1,30	91
NEE-40/17/12-230-IP12R	IP12R	230	±10	1,25	95
NEE-40/17/12-248-IP12R	IP12R	248	±8	1,20	102,6
NEE-40/17/12-256-IP12R	IP12R	256	±10	1,20	105,9
NEE-40/17/12-270-IP12R	IP12R	270	±10	0,95	111,7
NEE-40/17/12-300-IP12R	IP12R	300	±10	0,70	124
NEE-40/17/12-320-IP12R	IP12R	320	±10	0,65	132,5
NEE-40/17/12-356-IP12R	IP12R	356	±10	0,55	147,3
NEE-40/17/12-400-IP12R	IP12R	400	±10	0,48	165,4
NEE-40/17/12-430-IP12R	IP12R	430	±10	0,42	177,8
NEE-40/17/12-440-IP12E	IP12E	440	±10	0,35	182
NEE-40/17/12-440-IP12R	IP12R	440	±10	0,35	182
NEE-40/17/12-760-IP12R	IP12R	760	±15	0,20	314

WITHOUT GAP

DESCRIPTION ORDER	MATERIAL	Al [nH]	Tol.%	~g [mm]	~ µe
NEE-40/17/12-3560-IP12R	IP12R	3560	+30/-20	---	1473
NEE-40/17/12-3560-IP6	IP6	3560	+30/-20	---	1473

Others AL's by consulting