

**THORNTON**


Thornton  
Eletrônica Ltda

**NEE-65/33/39**

**Effective Core Parameters:**

<b>S I/A</b>	0,18	mm <sup>-1</sup>
<b>Le</b>	147,0	mm
<b>Ae</b>	798,0	mm <sup>2</sup>
<b>Amin</b>	---	mm <sup>2</sup>
<b>Ve</b>	117300,0	mm <sup>3</sup>

Weight Approx. (piece) 291,2 g

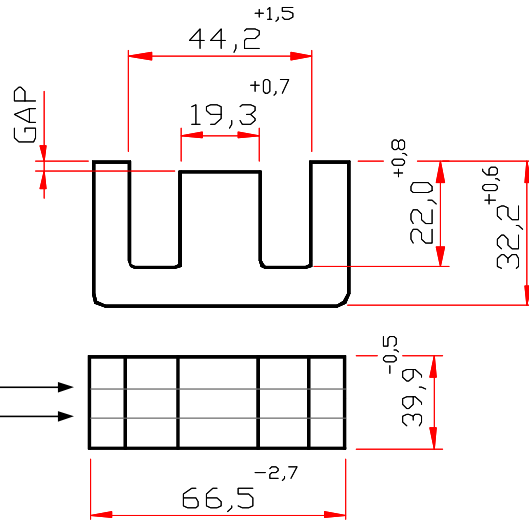

Dimensions in mm

\* By our choice, cores may be supplied glued or whole

**WITH GAP**

Items with gap by consulting

**WITHOUT GAP**

DESCRIPTION ORDER	Al [nH]	Tol. %	~g [mm]	~ μe
NEE-65/33/39-10800-IP6	10800	± 25	---	1547
NEE-65/33/39-10800-IP12E	10800	± 25	---	1547
NEE-65/33/39-10800-IP12R	10800	± 25	---	1547

Others AL's by consulting