

**THORNTON**


Thornton  
Eletrônica Ltda

NEI-30/27/11

**Parâmetros Efetivos do Núcleo:**

<b>S I/A</b>	0,52	mm <sup>-1</sup>
<b>Le</b>	58,0	mm
<b>Ae</b>	111,0	mm <sup>2</sup>
<b>Amin</b>	- - -	mm <sup>2</sup>
<b>Ve</b>	6440,0	mm <sup>3</sup>

Peso Aprox. (pç) 34,6 g

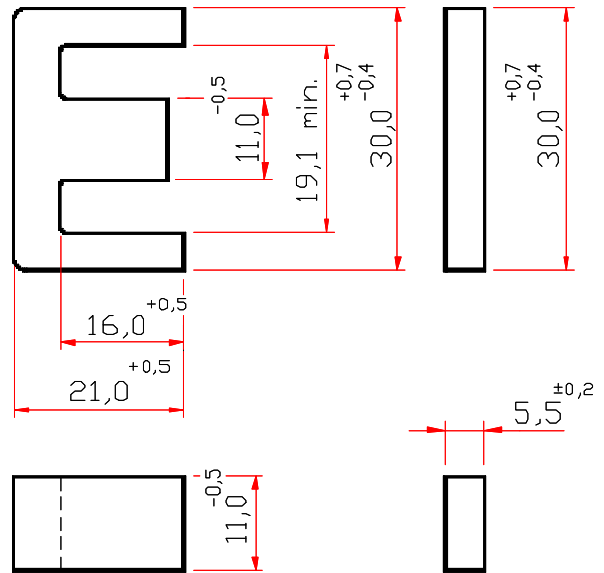

Dimensões em mm

**COM GAP**

DESCRIÇÃO DE ENCOMENDA	MATERIAL	Al [nH]	Tol. %	~g [mm]	~ µe
NEI-30/27/11-180-IP6	IP6	180	± 10	1,50	74
NEI-30/27/11-180-IP12R	IP12R	180	± 10	1,50	74
NEI-30/27/11-200-IP12R	IP12R	200	± 10	1,30	83
NEI-30/27/11-300-IP6	IP6	300	± 12	0,6	124
NEI-30/27/11-300-IP12R	IP12R	300	± 12	0,6	124
NEI-30/27/11-450-IP12R	IP12R	450	± 10	0,37	186,2

**SEM GAP**

DESCRIÇÃO DE ENCOMENDA	MATERIAL	Al [nH]	Tol. %	~g [mm]	~ µe
NEI-30/27/11-3300-IP6	IP6	3300	+30 / -20	- - -	1365
NEI-30/27/11-4000-IP12R	IP12R	4000	± 25	- - -	1655

Outros Al's mediante consulta